


# SPECIFICATION SHEET

## HD-XXXX-BM Bottom Mount, Rectangular, 2 Position, 2-wire, Motorized Zone Control Dampers

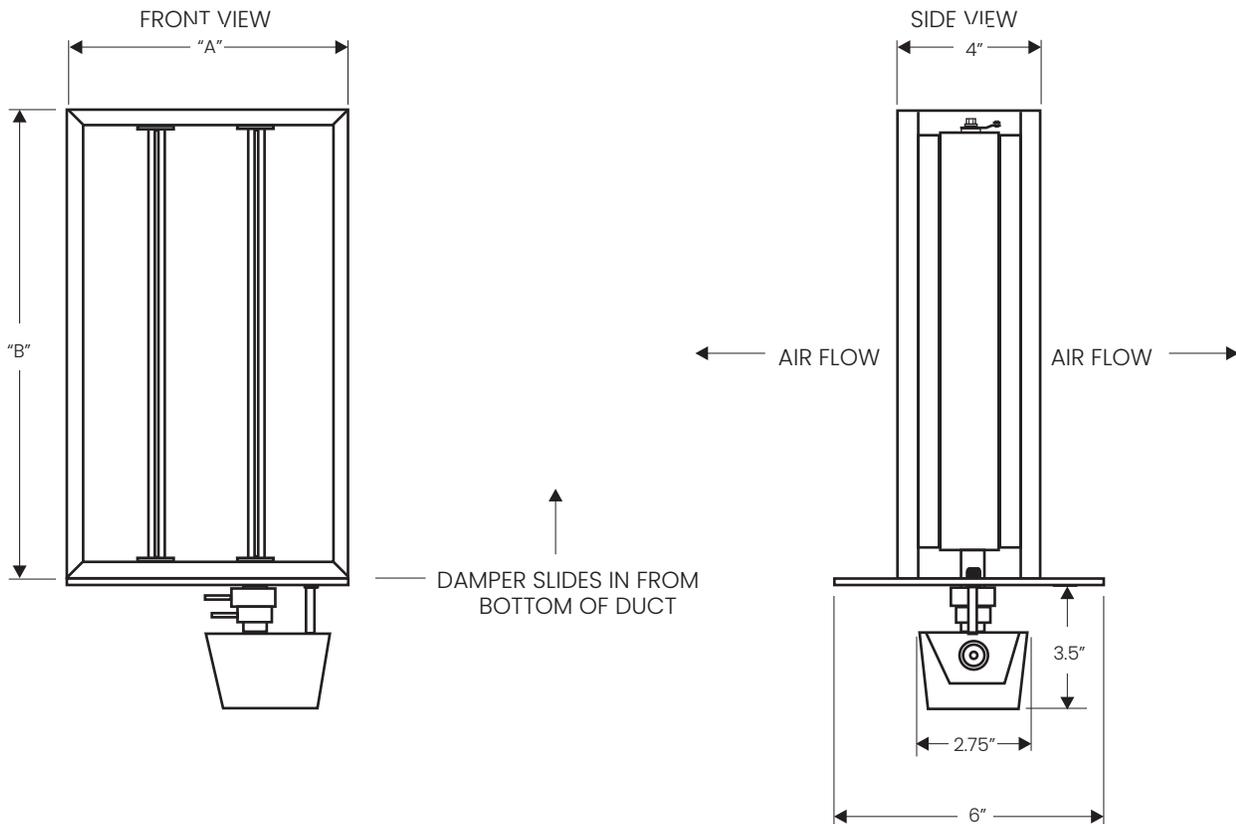

### SPECIFICATIONS

#### DIMENSIONS:

Damper models HD-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension. Actual (A) and (B) dimensions are undercut 1/4". Standard sizes range from 8" x 8" up to 36" (A dimension) x 24" (B dimension) in 2" increments. Airflow can be right to left or left to right.

#### APPLICATION:

Compatible for zone control and other HVAC applications with static pressures less than 1.0" w.c.

#### CONSTRUCTION:

- 1/16" extruded aluminum frame
- 1/16" extruded aluminum parallel blades
- 1/16" aluminum mounting flange
- Nylon bushings
- Minimum position adjustment

#### ELECTRICAL:

- 24 Volt, 10 VA, 0.43 Amp powered closed, spring return open actuator
- Also available in powered open, spring return closed
- Motor is impedance protected with no end switches