


# BAS-1P - 1Ø Building Automation Starter

1Ø, 110V, 1/10 - 1HP, 1Ø, 240V, 1/10 - 1HP  
 Adjustable 1-16A class 10 electronic overload  
 Run status verification



Special Instructions:



## FEATURES AND OPTIONS

- **On/Off Disconnect Switch with Recessed Hand/Auto Modes**
    - Concealed Hand/Auto switch discourages tampering
    - Lockable motor-rated On/Off switch meets safety regulations
    - Meets NEC motor service disconnect requirements when properly installed
    - LED indicator lights for power, run and fault
  - **Run Status Verification**
    - Integrated current sensing confirms motor operational status
    - Quickly and accurately pinpoint malfunctioning equipment
  - **Voltage & Dry Inputs for Auto Run Command**
    - Wire directly from the automation system to the starter, no interposing relays necessary
    - Save on installation costs and increase reliability.
  - **System Override Mode (Fireman's, Occupancy or Manual)**
    - Initiates smoke purge sequence during emergency situations for safety and code compliance or use for occupancy sensor run input (dry contact)
  - **Wide Range Class 10 Electronic Overload**
    - Prevents ordering confusion and eliminates call backs due to mis-sized heaters
    - Advanced protective features including anti-cycling, manual/auto rest, etc.
  - **Standard Single Gang Box Installation**
    - Easy to install in any location
    - Surface or flush mount capability
  - **High Reliability**
    - Heavy duty motor-rated switch and control relay
    - No thermal elements to fail
    - All units include a 5-Year warranty
    - UL 508 Listed
- Optional Features**
- **Overload Trip Reset**
    - Manual or automatic overload reset in the occurrence of a relay trip


# SPECIFICATION TABLE

BAS-1P Specification			
<b>Starter Type</b>			
BAS-1P - Standard Automation Starter, 1-Phase			
120~230VAC, 1-Phase, 50/60Hz input, Across the line, full-voltage non-reversing (1HP)			
NEMA Type 1 (NEMA 4 & NEMA 4X options available)			
<b>User Interface</b>			
On/Off Switch, Concealed Hand-Off-Auto Switch			
Standard Control Operations			
Inputs	Voltage Auto-Run	Accepts 12-120VAC/DC. Applying voltage will send a run command to the starter when in Auto mode.	
	Dry Contact Auto-Run	Normally Open dry contact. When closed, the starter will be commanded to run when in Auto mode.	
Outputs	Status Relay	Normally Open relay contacts. Status Relay will close when the motor draws 60% of the FLA dial setting.	Contact Ratings: 0.3A @ 125VAC, 1A @ 24VAC
	Fault Relay	Fault Relay will close in the event of a fault trip.	
Operational	Overload Type	Electronic I <sup>2</sup> t trip curve	
	Fault Reset	Manual or Automatic	
	Power Fail Mode	Return to last mode the starter was placed in (Hand/Off/Auto) with no delay (default)	
Environmental			
Ambient Operating Temp		-5° to 104° F (-20° to 40° C)	
Ambient Storage Temp		-5° to 185° F (-20° to 85° C)	
Relative Humidity		5% to 95% non-condensing	
Motor Protection		Adjustment / Description	Default Setting
Overload Current Setting Range		1-16A	Per FLA
Overload Trip Class		Class 10, Trip current = 115% of FLA setting	Class 10
Locked Rotor / Stall		Trips within 2 seconds @ 300% FLA setting	Always On

1Ø Building Automation Starter - 120~575 VAC

Part Number	Description
BAS-1P	Starter with Manual Overload Trip Reset
BAS-1P-AR	Starter with Automatic Overload Trip Reset


## BAS-1P WIRING SCHEMATICS

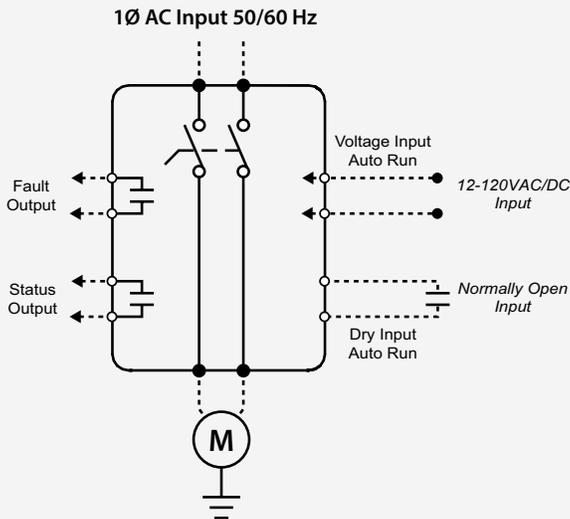



# STARTER ENCLOSURE DIMENSIONS

## NEMA 1 Dimensions

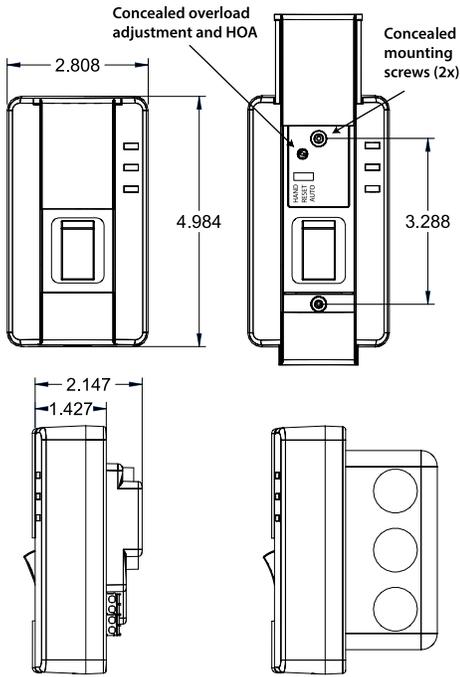

All dimensions displayed in inches

## NEMA 4 Dimensions

Starter Size	H	W	D
NEMA Size 00-2, Standard	16	14	8
NEMA Size 00-1, Combo			
NEMA Size 3, Standard	20	16	10
NEMA Size 2, Combo			
NEMA Size 3, Combo	20	20	10

All measurements in inches

