

Product Description


The Functional Devices, Inc.™ TR50VA015 is a Class II, 50 VA, 480/277/240/208/120 to 24 Vac Transformer with an integral circuit breaker. The foot and single threaded hub mount makes this transformer ideal for panel or junction box mounting.

Product Specifications

| | |
|---------------------------------|---|
| VA Rating: | 50 |
| Frequency: | 50/60 Hz |
| Mounting: | Foot & single threaded hub |
| Over Current Protection: | Circuit Breaker |
| Dimensions: | 3.405" x 2.517" x 3.013" (w/ .500" NPT Hub) |
| Wire Length: | 9.5" Typical w/ .5" Strip |
| Operating Temperature: | -30 to 140°F |
| MTBF: | 100,000 Hours @ 77°F |
| Construction: | Split-Bobbin |
| Weight: | 2.80 lbs. |
| Approvals: | Class II UL5085-3 Listed, C-UL, CE, RoHS |





Product Dimensions

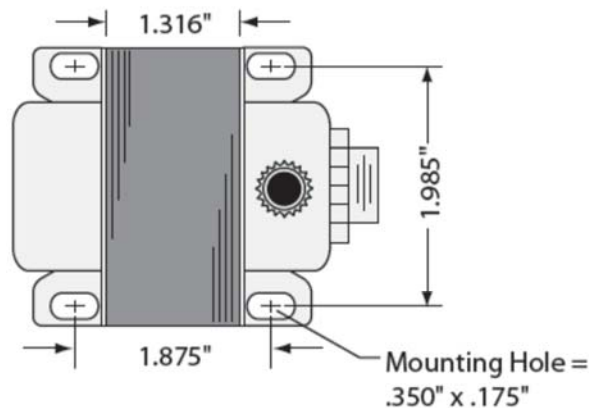

| PRIMARY WIRES | SECONDARY WIRES |
|---------------|------------------|
| Gry - 480 Vac | Yel/Wht - 24 Vac |
| Brn - 277 Vac | |
| Org - 240 Vac | |
| Red - 208 Vac | |
| Wht - 120 Vac | |
| Blk - Comm | Yel - Comm |

Secondary Yel/Wht wire in phase with Primary Blk wire.

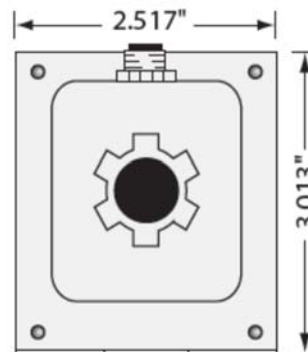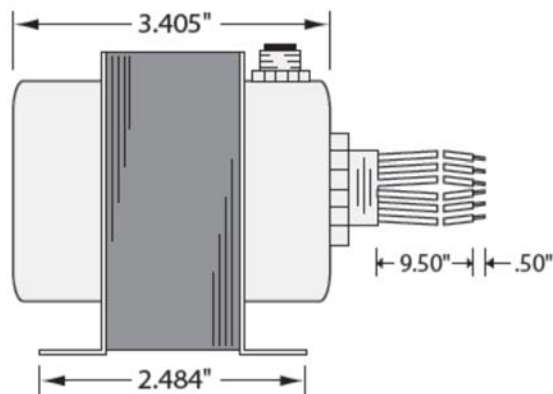

Specifications are subject to change without notice.

Functional Devices, Inc. is a trademark of Functional Devices, Inc. RIB is a registered trademark of Functional Devices, Inc.

Website: www.jacksonsystems.com
E-mail: info@jacksonsystems.com

5418 Elmwood Avenue
Indianapolis, IN 46203-6025

Toll-Free: 888.652.9663
Fax: 317.227.1034