


Plenum Multi-Conductor Cable

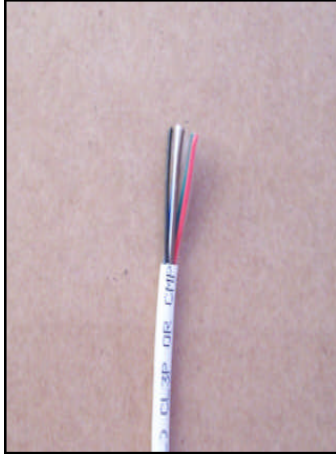

Plenum Non-Shielded Multi-Conductor Cable

UL LISTED: CL3P/ CMP
SOLID AND STRANDED BARE COPPER CONDUCTORS
CABLED CONDUCTORS
COLOR CODED KYNAR, SOLEF, OR PVC INSULATION

FLEXIBLE PLENUM JACKET: WHITE
(Custom color and striped color jackets available)
COLOR CODE CHART: 1

Part Number	Awg/Stranding	Cond.	Nom. Insul. Thickness	Nom. Jacket Thickness	Nom. OD	Lbs./1000'
8010PL	22 (solid)	4C	.009	.015	.145	14
4020PL	22 (7 x 30)	2C	.009	.015	.124	10
4220PL	22 (7 X 30)	4C	.009	.015	.140	17
5150PL	22 (7 X 30)	6C	.009	.015	.171	24
5160PL	22 (7 X 30)	8C	.009	.015	.186	31
5170PL	22 (7 X 30)	10C	.009	.015	.218	43
5180PL	22 (7 X 30)	12C	.009	.015	.225	49
4030PL	20 (7 X 28)	2C	.009	.015	.138	14
4130PL	20 (7 X 28)	3C	.009	.015	.150	19
4040PL	18 (7 X 26)	2C	.009	.015	.157	18
4140PL	18 (7 X 26)	3C	.009	.015	.170	25
4240PL	18 (7 X 26)	4C	.009	.015	.185	36
4246PL	18 (7 X 26)	6C	.009	.015	.220	51
4248PL	18 (7 X 26)	8C	.009	.015	.242	65
4050PL	16 (19 X 29)	2C	.009	.015	.180	26
4150PL	16 (19 X 29)	3C	.009	.015	.190	37
4250PL	16 (19 X 29)	4C	.009	.015	.215	52
4060PL	14 (19 X 27)	2C	.011	.015	.222	40
4160PL	14 (19 X 27)	3C	.011	.015	.240	58
4165PL	14 (19 X 27)	4C	.011	.015	.270	78
4070PL	12 (19 X 25)	2C	.011	.015	.260	58