

## 2-WIRE ROUND/RECTANGULAR ZONE DAMPERS


The D Series dampers are galvanized steel, single-blade dampers with a 24 volt spring return actuator. These dampers are shipped complete and ready for installation. They are rated for duct systems with less than 1.0" WC. The D Series damper has a simple adjustment for setting the minimum position.

### Features and Benefits:

- Compatible with most zone control panels
- 24-gauge steel shell
- Tight seal gasket
- 24V synchronous motor
- Can be configured as PC/SO or PO/SC
- Quiet operation
- Simple adjustment for setting the minimum position

### Warranty:

- 5 Years

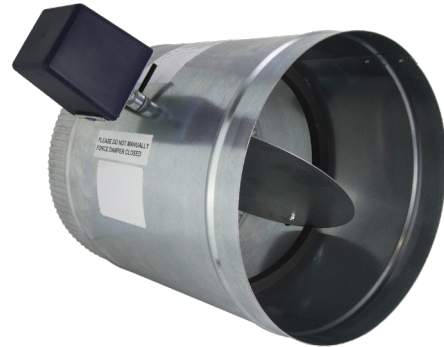

### Specifications:

<b>Construction</b>	24-gauge steel shell
<b>Sizes</b>	4", 5", 6", 7", 8", 9", 10", 12", 14", 16", 18", 20"
<b>Damper Actuator Type</b>	24VAC, 10VA, 2-wire power close/spring open

The HD Series dampers are extruded aluminum parallel blade dampers with a 24 volt spring return actuator. The HD Series dampers can be installed in any position. They are rated for duct systems with less than 1.0" WC. The damper has a simple adjustment for setting the minimum position.

### Features and Benefits:

- Compatible with most zone control panels
- Extruded aluminum
- 24V synchronous motor
- Can be configured as PC/SO or PO/SC
- Quiet operation
- Simple adjustment for setting the minimum position

### Warranty:

- 5 Years



### Specifications:

<b>Construction</b>	Extruded aluminum
<b>Sizes</b>	6" x 6" to 36" x 24" side-mount or bottom-mount
<b>Damper Actuator Type</b>	24VAC, 10VA, 2-wire power close/spring open